

Belanko™ S



S I M P L I C I T Y

M E E T S S T Y L E

CONTENTS

- 02 Stylish design
- 04 Safe and swift installation
- 06 Strong offerings
- 08 Sensible functions for hotels
- 10 Scalable setup
- 12 Catalogue pages
- 19 Selection charts

S I M P L



S T Y L E

I C I T Y



S A F E T Y



STYLISH DESIGN

Timeless classics meet a new favourite

There is always room for the basic white and ivory colours because they blend perfectly with every room design. For something different, **Belanko™ S** also offers the anthracite finish.



Glossy finish for easy cleaning



Thin matt finish edging for a distinctive look



Slim profile for a modern touch

Subtle enhancements that make a difference

Essentials always work. **Belanko™ S** ticks all the boxes for the essential range with a little extra – premium quality, clean lines, smooth surface and slim profile.



White




Anthracite



Ivory

SAFE AND SWIFT INSTALLATION



Flexibility

Oblong shaped holes provide flexibility for easy adjustment when the switch is not set straight

Safe installation

No access to live metal parts even if the cover plate and plate are not installed




All-in-one

Switch plate and rocker are supplied as a set to enable quick installation

Safer for the installer, safer for the user

We share the same goal. To get the job done fast, safely and perfectly. **Belanko™ S** was engineered to meet just that purpose.

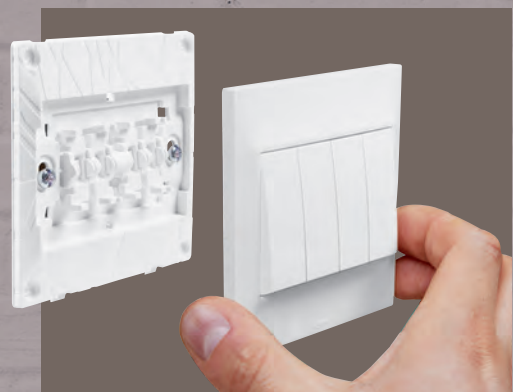


Just one click

Clip up to a 4 gang switch single-handed

ION

Robustness
Ribs make the switch sturdy

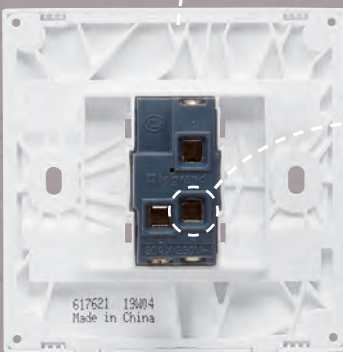

Easy wiring
Save time with ready-to-wire screw terminals




Perfect protection for a neat result

The soft protection film keeps the product safe from dust and scratches until the work has been completed. Only the soft protection film will get stained by the ongoing wall paintwork.




STRONG


OFFERINGS

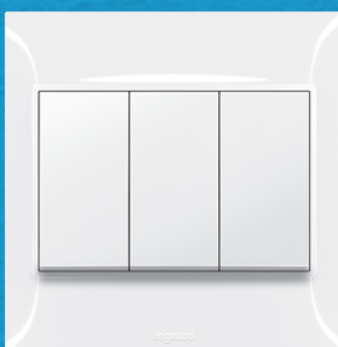


3 gang switch

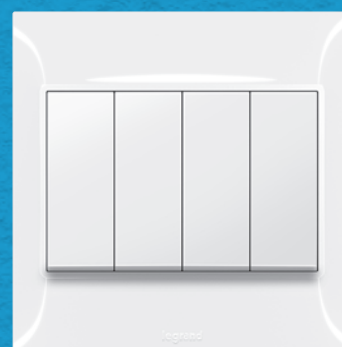

4 gang switch

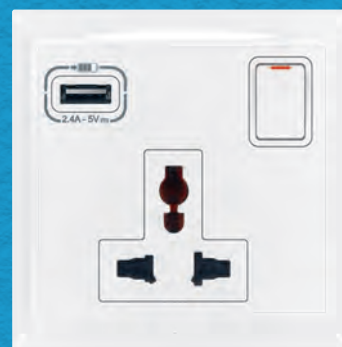

Multistandard switched socket outlet
16A with USB A-Type charger



Switched fused connection unit
with neon and cord outlet

Above standard selection for standard homes

There is no place like home. Make it comfortable and optimal for modern lifestyles.



Universal dimmer suitable for all modern loads



Dimmable LEDs



Dimmable compact fluorescent lamps



Halogen with electronic or ferromagnetic transformer



Incandescent and halogen lamps



Multistandard switched socket outlet 16A with USB A-Type charger and IP55 cover



Suitable for outdoor use

The splash-proof cover allows a 1 gang Belanko™ S mechanism to be installed in outdoor environments. It also ensures protection against dust. With plug engaged, IP55 protection is maintained.

SENSIBLE

FUNCTIO

FOR HOTELS



Indicator for corridor



Key card switch



Internal control unit



A comprehensive range of hospitality applications

The best compliment for a hotel is when guests feel at home. Now, be a hospitable host at all times with **Belanko™ S** thanks to its hospitality functions.

Compliant with Guest Room Management Systems for hotel operators to efficiently control and manage facilities

NS



2 gang multistandard switched socket outlet with USB A-Type & C-Type charger



Keystone data socket



Shaver socket



SCALABLE

SETUP

Infinite possibilities with
limitless combinations

There is no need to settle for less.
Belanko™ S works both independently
and with the Arteor range. The Arteor
adaptor offers perfect versatility
for your every need – hospitality,
residential and commercial projects.




Automatic switch



Skirting light



Light whenever and wherever needed

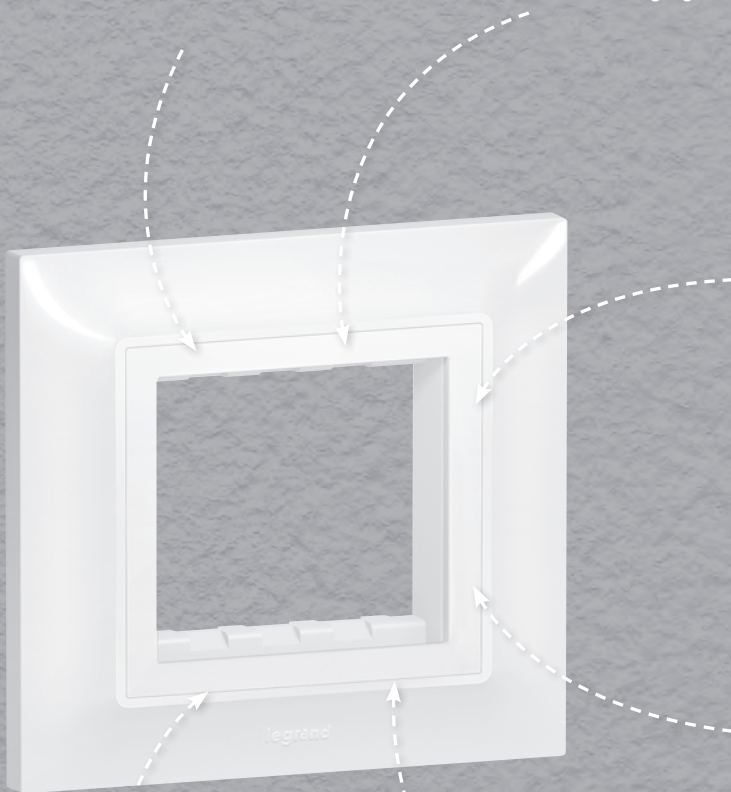

Adaptor for Arteor mechanism



Electronic room thermostat



Temperature controlled every day, every minute



Sensitive switch



No contact needed to switch on and off



Power up quickly and easily



USB C-Type charger



HDMI socket



Quality display ready and available

...and more.

Belanko™ S

single pole switches and push-buttons



6 176 01



6 176 05



6 176 07



6 176 11



6 176 16

Conform to BS EN 60669-1

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack Cat.Nos Single pole switches 16 AX - 250 V~

Pack	Cat.Nos	Switch Type	Colors
10	6 176 00	1 gang - 1-way switch	○ White
10	6 177 00		● Anthracite
10	6 178 00		● Ivory
10	6 176 01	1 gang - 2-way switch	○ White
10	6 177 01		● Anthracite
10	6 178 01		● Ivory
10	6 176 02	2 gang - 1-way switch	○ White
10	6 177 02		● Anthracite
10	6 178 02		● Ivory
10	6 176 03	2 gang - 2-way switch	○ White
10	6 177 03		● Anthracite
10	6 178 03		● Ivory
10	6 176 09	Intermediate switch	○ White
10	6 177 09		● Anthracite
10	6 178 09		● Ivory
10	6 176 04	3 gang - 1-way switch	○ White
10	6 177 04		● Anthracite
10	6 178 04		● Ivory
10	6 176 05	3 gang - 2-way switch	○ White
10	6 177 05		● Anthracite
10	6 178 05		● Ivory
10	6 176 06	4 gang - 1-way switch	○ White
10	6 177 06		● Anthracite
10	6 178 06		● Ivory
10	6 176 07	4 gang - 2-way switch	○ White
10	6 177 07		● Anthracite
10	6 178 07		● Ivory

Pack Cat.Nos Single pole switches 20 AX - 250 V~

Pack	Cat.Nos	Switch Type	Colors
10	6 176 20	1 gang - 1-way switch	○ White
10	6 177 20		● Anthracite
10	6 178 20		● Ivory
10	6 176 21	1 gang - 2-way switch	○ White
10	6 177 21		● Anthracite
10	6 178 21		● Ivory
10	6 176 22	2 gang - 1-way switch	○ White
10	6 177 22		● Anthracite
10	6 178 22		● Ivory
10	6 176 23	2 gang - 2-way switch	○ White
10	6 177 23		● Anthracite
10	6 178 23		● Ivory
10	6 176 24	3 gang - 1-way switch	○ White
10	6 177 24		● Anthracite
10	6 178 24		● Ivory
10	6 176 25	3 gang - 2-way switch	○ White
10	6 177 25		● Anthracite
10	6 178 25		● Ivory

Push-buttons 6 A - 250 V~

Pack	Cat.Nos	Push-button Type	Colors
10	6 176 10	1 gang	○ White
10	6 177 10		● Anthracite
10	6 178 10		● Ivory
10	6 176 15	2 gang	○ White
10	6 177 15		● Anthracite
10	6 178 15		● Ivory
10	6 176 11	Bell push	○ White
10	6 177 11		● Anthracite
10	6 178 11		● Ivory
10	6 176 16	2 gang for shutters	○ White
10	6 177 16		● Anthracite
10	6 178 16		● Ivory

Belanko™ S

double pole switches and cooker control unit



6 176 72 6 176 76

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	6 176 73	1 gang - 1-way switch <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 73	
10	6 178 73	
10	6 176 70	1 gang - 1-way switch + red neon indicator <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 70	
10	6 178 70	
10	6 176 71	1 gang - 1-way switch + red neon indicator + earth connection <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 71	
10	6 178 71	
10	6 176 72	1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 72	
10	6 178 72	
5	6 176 75	Double pole switches 45 A - 250 V~ 1 gang - 1-way switch <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
5	6 177 75	
5	6 178 75	
5	6 176 76	1 gang - 1-way switch + red neon indicator <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
5	6 177 76	
5	6 178 76	
5	6 176 77	2 gang - 1-way vertical switch + red neon indicator <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
5	6 177 77	
5	6 178 77	
5	6 176 78	Cooker control unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
5	6 177 78	
5	6 178 78	

Belanko™ S

dimmers and ventilation control



6 176 35 6 176 33

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Dimmers
1	6 176 31	500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way : - 60-500 W (127 V) for incandescent and halogen lamps - 60-600 VA (230 V) / 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Slider at the back to select 230 V or 127 V <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
1	6 177 31	
1	6 178 31	
1	6 176 35	300 W RLC+LED dimmer For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - halogen and incandescent 240 VA: 5 W to 300 W / 5 W to 150 W (127 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
1	6 177 35	
1	6 178 35	
1	0 401 49	Active Power Compensator Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W
1	6 176 33	Ventilation control Conform to BS EN 60669-1 Fan control 250 V~ - 50 Hz <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
1	6 177 33	
1	6 178 33	



6 176 27



6 176 38



6 176 95



6 176 91



6 176 34

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 176 27	Single TV socket, female ○ White ● Anthracite ○ Ivory
10	6 177 27	
10	6 178 27	
10	6 176 26	Single TV socket, "F" type ○ White ● Anthracite ○ Ivory
10	6 177 26	
10	6 178 26	
10	6 176 38	Double TV socket, female + "F" type ○ White ● Anthracite ○ Ivory
10	6 177 38	
10	6 178 38	
10	6 176 30	TV-R socket ○ White ● Anthracite ○ Ivory
10	6 177 30	
10	6 178 30	

Pack	Cat.Nos	Data sockets
10	6 176 91	RJ 45 Cat.6 UTP ○ White ● Anthracite ○ Ivory
10	6 177 91	
10	6 178 91	
10	6 176 92	Double RJ 45 Cat.6 UTP ○ White ● Anthracite ○ Ivory
10	6 177 92	
10	6 178 92	
10	6 176 17	1 gang - single Keystone adaptor ○ White ● Anthracite ○ Ivory
10	6 177 17	
10	6 178 17	
10	6 176 34	1 gang - double Keystone adaptor ○ White ● Anthracite ○ Ivory
10	6 177 34	
10	6 178 34	

Pack	Cat.Nos	Telephone sockets
10	6 176 99	Telephone connection block 10 connections ○ White ● Anthracite ○ Ivory
10	6 177 99	
10	6 178 99	
10	6 176 95	BS master ○ White ● Anthracite ○ Ivory
10	6 177 95	
10	6 178 95	
10	6 176 96	BS secondary ○ White ● Anthracite ○ Ivory
10	6 177 96	
10	6 178 96	
10	6 176 97	RJ 11 socket ○ White ● Anthracite ○ Ivory
10	6 177 97	
10	6 178 97	
10	6 176 98	Double RJ 11 socket ○ White ● Anthracite ○ Ivory
10	6 177 98	
10	6 178 98	

Belanko™ S

hotel equipment



Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 176 12	16 A - 230 V~ - 50/60 Hz Time delay of approx. 30 s after card removal Use card with width max. 54 mm
1	6 177 12	○ White
1	6 178 12	● Anthracite ○ Ivory

Pack	Cat.Nos	Hotel bedrooms call indicators
10	6 176 13	2 settings : - Do not disturb - Please clean the room
10	6 177 13	Indicator for corridor Installed in the corridor, displays calls
10	6 178 13	○ White ● Anthracite ○ Ivory

Pack	Cat.Nos	Internal control unit
10	6 176 14	Installed in the room, allows the user to select the desired setting
10	6 177 14	○ White
10	6 178 14	● Anthracite ○ Ivory

Pack	Cat.Nos	Shaver sockets
1	6 176 08	Conform to BS 61558. 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep. Spacer delivered to fit in standard box, deep 35 mm
1	6 177 08	2 gang
1	6 178 08	○ White ● Anthracite ○ Ivory

Pack	Cat.Nos	Security switch
1	6 176 19	1 A resistive - 250 V~
1	6 177 19	Panic button
1	6 178 19	○ White ● Anthracite ○ Ivory

Pack	Cat.Nos	Arteur adaptor
20	6 176 37	Allows the integration of 2 modules Arteur mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc
		1 gang ○ White


For integration of Arteur functions, see Arteur offer



Belanko™ S

hotel equipment

Guest Room Management System

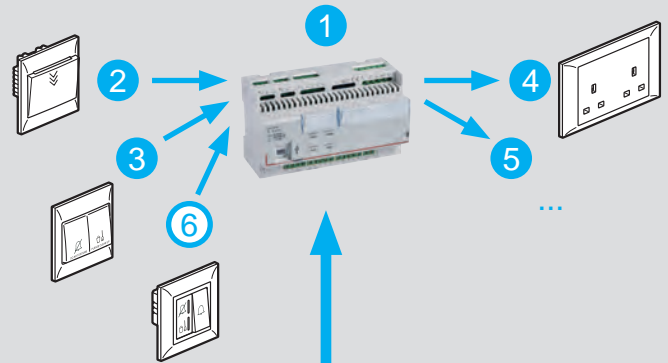

The Room Controller Unit, Cat.No 048408 or 048412, associated with mechanical Belanko™ S functions can manage the lights, sockets outlet, ventilation and curtains independently in each room. It can be integrated with the Building Management System (BMS) and the Property Management System (PMS) in order to enable a global management of the building and the hotel's operations.

For complementary information on the Room controller, please contact us





6 176 41



6 176 51



6 176 58



6 176 44

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~	Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~ with USB charger
10	6 176 41	Conform to BS 1363-2 1 gang single pole switched ○ White ● Anthracite ● Ivory	1	6 176 58	Conform to BS 1363-2:2016 Conform to IEC 60950-1 1 gang single pole switched USB A-Type 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
10	6 177 41		1	6 177 58	
10	6 178 41		1	6 178 58	
5	6 176 46	2 gang single pole switched ○ White ● Anthracite ● Ivory	1	6 176 57	1 gang unswitched USB A-Type 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
5	6 177 46		1	6 177 57	
5	6 178 46		1	6 178 57	
10	6 176 40	1 gang unswitched ○ White ● Anthracite ● Ivory	1	6 176 44	2 gang single pole switched USB A-Type + C-Type 3 A - 5 V _{DC} - 15 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ● Ivory
10	6 177 40		1	6 177 44	
10	6 178 40		1	6 178 44	
5	6 176 45	2 gang unswitched ○ White ● Anthracite ● Ivory	10	6 176 50	British Standard socket outlets 15 A - 250 V~ Conform to BS 546 1 gang unswitched ○ White ● Anthracite ● Ivory
5	6 177 45		10	6 177 50	
5	6 178 45		10	6 178 50	
10	6 176 43	1 gang double pole switched ○ White ● Anthracite ● Ivory	10	6 176 51	1 gang single pole switched ○ White ● Anthracite ● Ivory
10	6 177 43		10	6 177 51	
10	6 178 43		10	6 178 51	
5	6 176 48	2 gang double pole switched ○ White ● Anthracite ● Ivory	10	6 176 52	1 gang single pole switched + neon ○ White ● Anthracite ● Ivory
5	6 177 48		10	6 177 52	
5	6 178 48		10	6 178 52	
10	6 176 42	1 gang single pole switched + neon ○ White ● Anthracite ● Ivory	10	6 176 53	2 gang single pole switched ○ White ● Anthracite ● Ivory
10	6 177 42		10	6 177 53	
10	6 178 42		10	6 178 53	
5	6 176 47	2 gang single pole switched + neon ○ White ● Anthracite ● Ivory	10	6 176 54	British Standard socket outlets 5 A - 250 V~ Conform to BS 546 1 gang single pole switched ○ White ● Anthracite ● Ivory
5	6 177 47		10	6 177 54	
5	6 178 47		10	6 178 54	
5	6 176 49	2 gang single pole switched with red cover + neon ● Red			

Belanko™ S

socket outlets (continued)



Belanko™ S

fused connection units and cable outlets



6 176 67



6 176 55



6 176 90



6 176 82



6 176 85

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
 Supplied with 2 screws M3.5 for BS boxes

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
 Supplied with 2 screws M3.5 for BS boxes

Euro/US socket outlets - 16 A - 250 V \sim / 15 A - 127 V \sim

Pack	Cat.Nos	1 gang - 2 x 2P
10	6 176 62	<ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 62	
10	6 178 62	
10	6 176 90	1 gang - 2 x 2P switched <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 90	
10	6 178 90	
10	6 176 64	1 gang - 2 x 2P+E <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 64	
10	6 178 64	

German Standard socket outlet 16 A - 250 V \sim

10	6 176 56	1 gang - 2P+E with shutters for child protection <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 56	
10	6 178 56	

Multistandard switched socket outlet

10	6 176 67	1 gang <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 67	
10	6 178 67	
4	6 176 69	2 gang <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
4	6 177 69	
4	6 178 69	

Multistandard switched socket outlets 16 A 250 V \sim / 15 A - 127 V \sim with USB charger

Shuttered for child safety
 USB charger conform to IEC 60950-1

1	6 176 59	1 gang - 2P+E USB A-Type 2.4 A - 5 V \sim - 12 W Consumption in passive mode < 0.08 W
1	6 177 59	
1	6 178 59	
1	6 176 55	2 gang - 2 x 2P+E USB A-Type + C-Type 3 A - 5 V \sim - 15 W Consumption in passive mode < 0.08 W
1	6 177 55	
1	6 178 55	

Fused connection units 13 A




Pack	Cat.Nos	Conform to BS 1363-4
10	6 176 80	Unswitched + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 80	
10	6 178 80	
10	6 176 81	Switched + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 81	
10	6 178 81	
10	6 176 60	Unswitched + neon + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 60	
10	6 178 60	
10	6 176 82	Switched + neon + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 82	
10	6 178 82	






Cable outlets

Conform to BS 5733

10	6 176 85	20 A - 250 V\sim <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 85	
10	6 178 85	
10	6 176 86	45 A - 250 V\sim <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 86	
10	6 178 86	



Pack	Cat.Nos	Blanking plates
10 10 10	6 176 28 6 177 28 6 178 28	<p>Conform to BS 5733</p> <p>1 gang</p> <ul style="list-style-type: none"> ○ White ● Anthracite ● Ivory 
5 5 5	6 176 39 6 177 39 6 178 39	<p>2 gang</p> <ul style="list-style-type: none"> ○ White ● Anthracite ● Ivory 
20	6 176 37	<p>Arteor adaptor</p> <p>Allows the integration of 2 modules Arteor mechanisms such as R.C.B.O., automatic switch, skirting lights, USB charger, etc</p> <p>1 gang</p> <ul style="list-style-type: none"> ○ White 

Pack	Cat.Nos	Fixing accessories
2	6 176 36	<p>Splash-proof cover</p> <p>Mainly for socket protection IP 55 with or without plug engaged</p> <p>Space inside : 86 x 86 mm</p> <ul style="list-style-type: none"> ● Mist grey 
	6 711 31 1G 6 711 31 2G	<p>Weatherproof cover</p> <p>IP55 and transparent color</p> <ul style="list-style-type: none"> 1 gang 2 gang 
8 4	6 133 50 6 133 51	<p>Surface-mounting boxes</p> <p>Conform to BS 5733</p> <p>Depth 35 mm</p> <p>1 gang</p> <ul style="list-style-type: none"> ○ White  <p>2 gang</p> <ul style="list-style-type: none"> ○ White 
	SKOB-1A+NW SKOB-2+NW	<p>Flush-mounting boxes</p> <p>White color</p> <ul style="list-style-type: none"> 1 gang box – 77 x 77 x 35 mm 2 gang box – 77 x 137 x 38 mm 



For integration of Arteor functions, see Arteor offer



f Legrand Myanmar
www.legrand.com.mm



**FOR MORE
INFORMATION
ABOUT OUR
SOLUTIONS**





Legrand Myanmar Branch

Yangon Showroom

Room No (304), Level-2, Building (15),
MICT Park, Hlaing Universities' Campus,
Hlaing Township.

Tel: 01-230 5240

Mandalay Showroom

Block 2, Unit 5, Between Mingalar 2 and 3
Street, Mingalar Mandalay Compound,
Chan Mya Tar Zi Township.

Tel: 09-99 69 90 83 84

FOLLOW US ALSO ON

 www.legrand.com.mm

 Legrand Myanmar Facebook

 Legrand Myanmar YouTube

 customerhub.mm@legrandelectric.com