


ELOÉ™

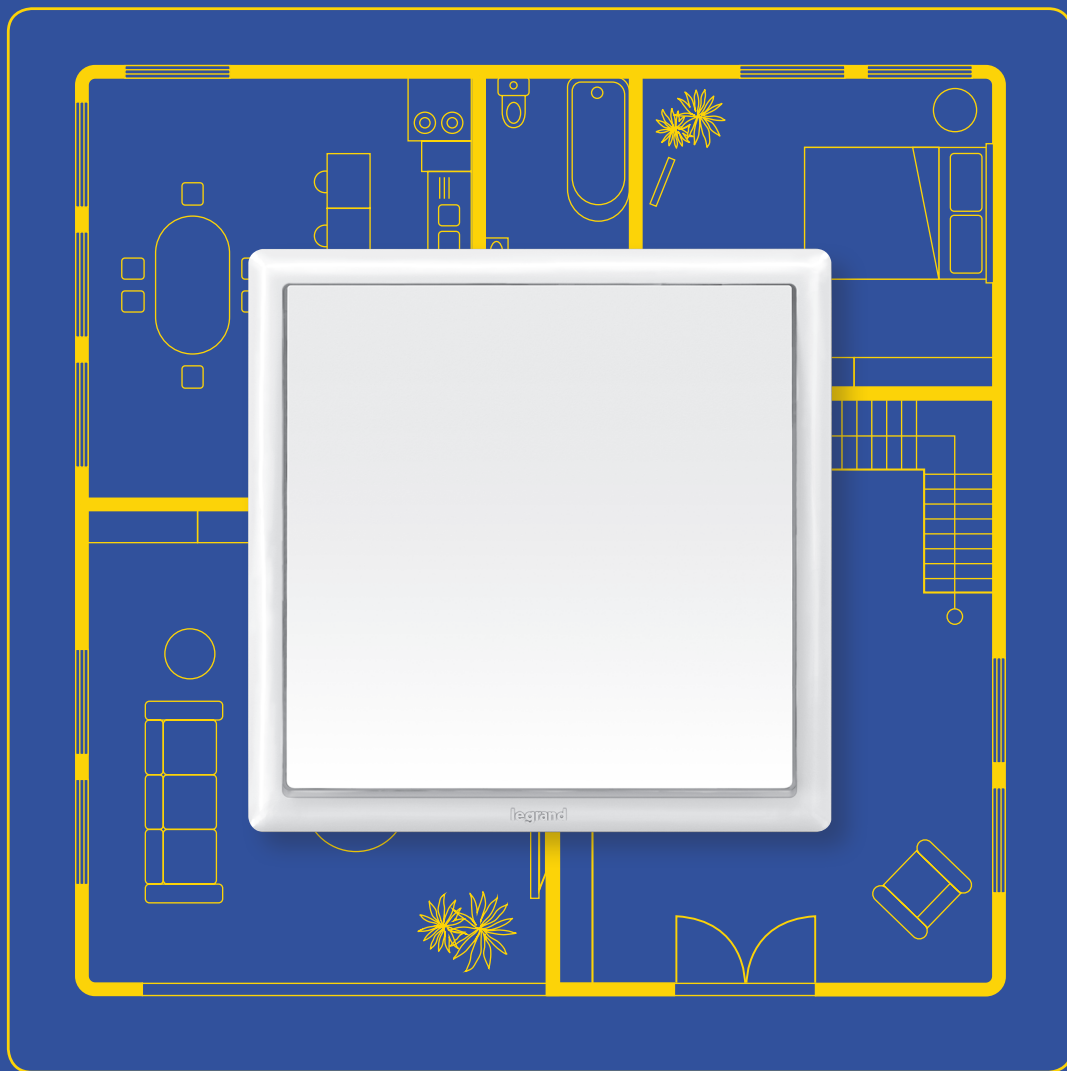

Everything just **ADDS** up

THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand**®

ELOÉ™

**When you choose ELOÉ™
for your project, you are not just
choosing a modern design and
versatile functions, you are also
opting for easy installation –
and better value. ELOÉ™ adds to
your winning formula.**

CONTENTS


02 **ADD DETAILS** that matter

04 **ADD VALUE** to your productivity

06 **ADD POSSIBILITIES** to projects

08 **ADD** a touch of **COMFORT**


10 Catalogue pages

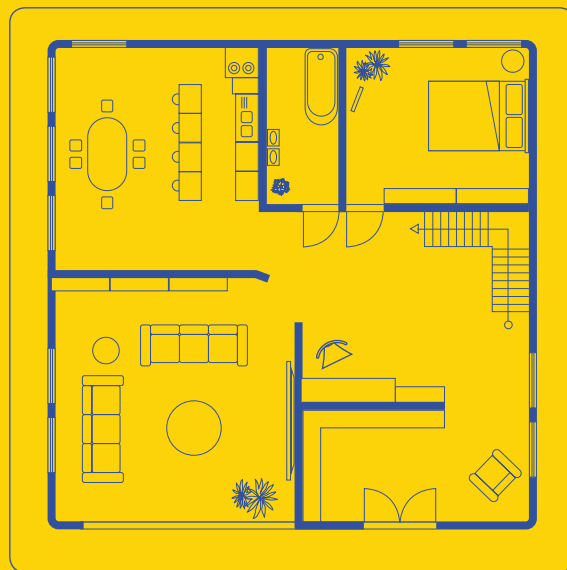

Everything just
ADDS up

ADD DETAILS that matter

Good design doesn't always have to be complex. With ELOÉ™, it combines details that make sense and add to the overall experience – for both users and installers.

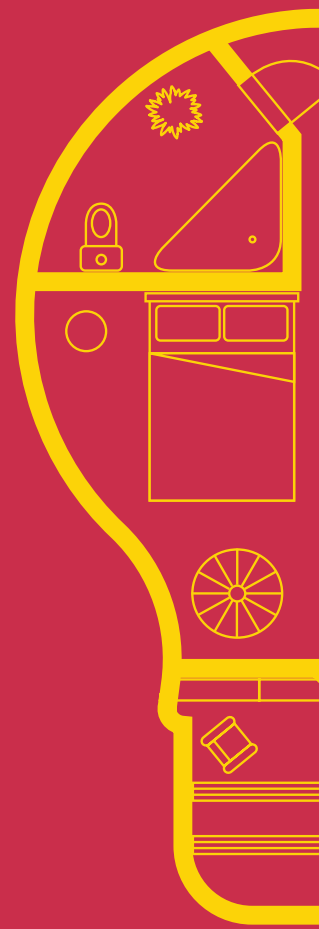

LARGE ROCKER
Ergonomically designed for a great user experience



GLOSSY FINISH
Smooth glossy surface makes cleaning fuss-free.




COMPLIANT WITH STANDARDS
ELOÉ™ is designed to meet international standards – IEC and BS.



SUBTLE CURVES
Rounded corners and curves add a touch of elegance.




STRONG PROFILE
Clean lines and a distinct shape enhance the visual appeal of ELOÉ™.

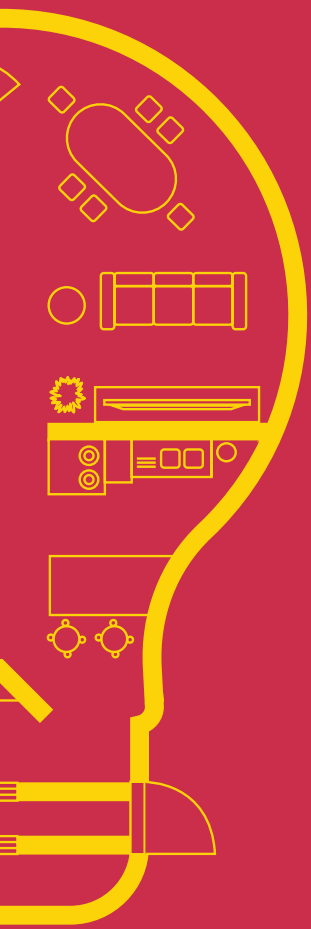

Superior design and quality




DESIGNED TO LAST
Even the concealed functional parts have been carefully designed.

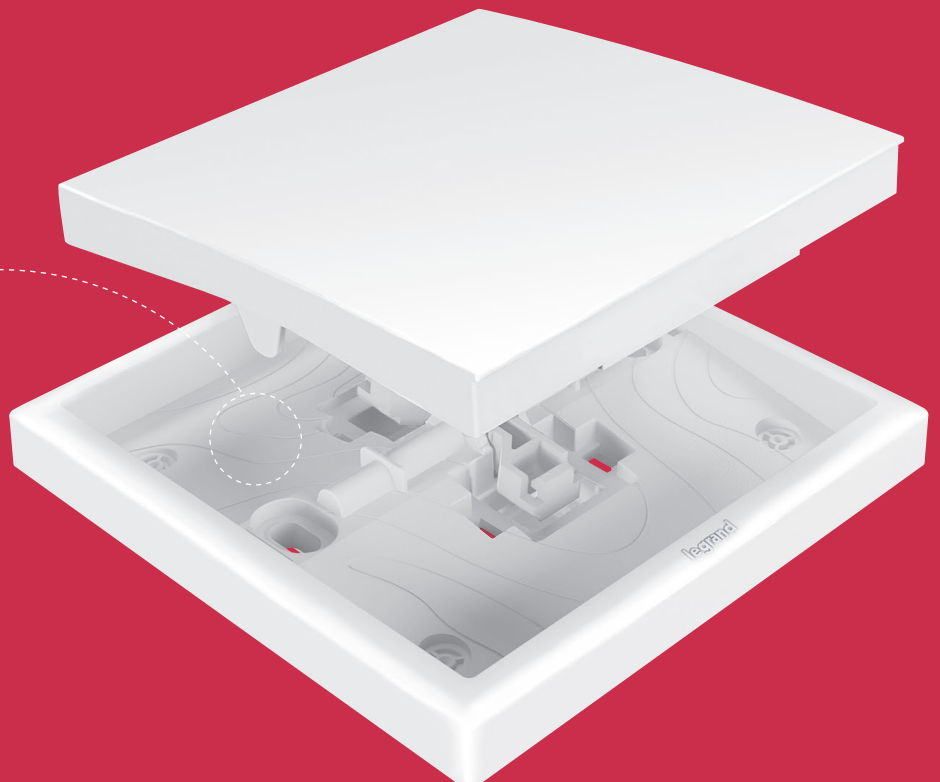

ADD VALUE to your productivity

No matter how unpredictable the conditions at your worksite may be, ELOÉ™ takes the uncertainty out of your project by making every installation simple, fuss-free, safe, on time – and on budget.

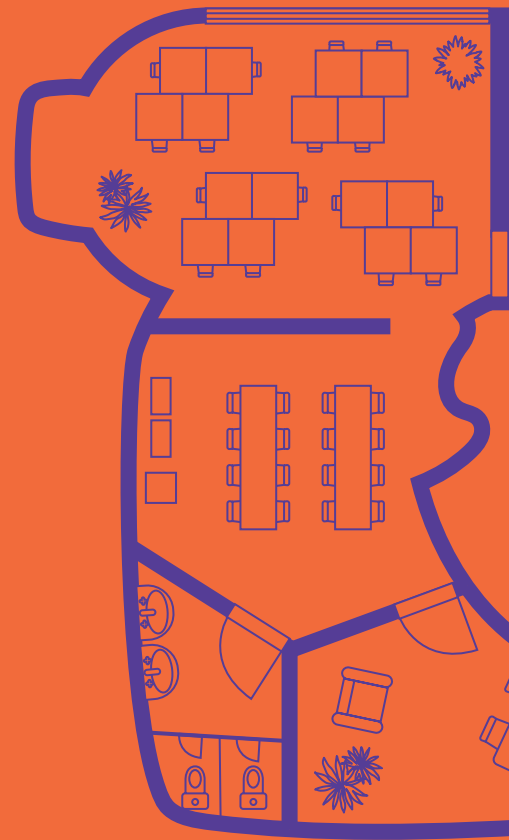

TIME SAVING
Large terminal capacity allows for quick and easy wiring and connection to multiple outlets.




ROBUSTNESS
Ribbs make the switch sturdy.




UNIVERSAL SCREW HEADS

For both wiring and adjusting ELOÉ™, you need only one screwdriver head to get the installation done.

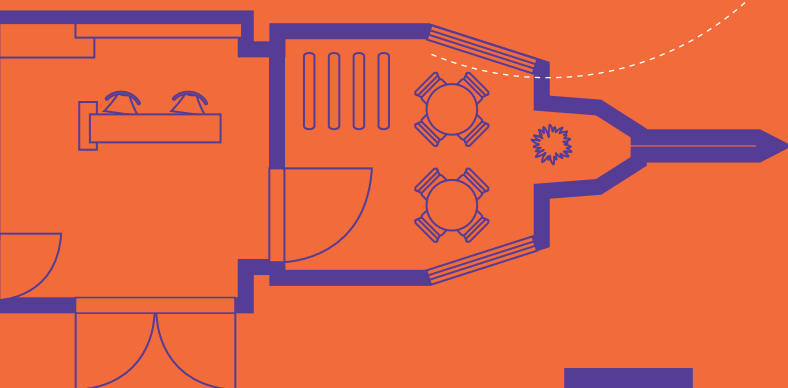

Easy installation



FLEXIBILITY
Oblong shaped holes ensure flexibility for easy adjustment when the switch is not straight.



EASY TO ORDER

1 catalogue number = 1 complete product




SAFE AND FAST INSTALLATION

No access to metal parts ensures your safety during installation. The one-piece plate/mechanism also means that installation can be completed in three simple steps.

ADD POSSIBILITIES to projects

Whether you are working on an integrated development or a straightforward build, ELOÉ™ provides the functions you need.

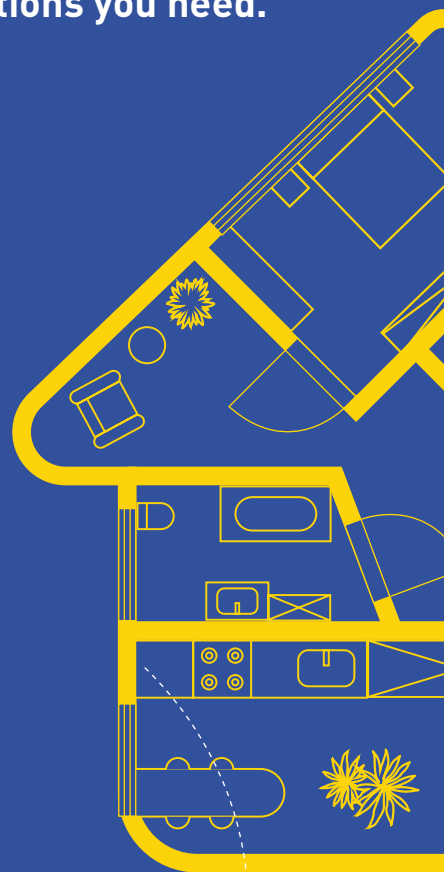

**UNIVERSAL DIMMER SUITABLE
FOR ALL MODERN LOADS**



Dimmable LEDs




Dimmable compact fluorescent lamps



Incandescent and halogen lamps



Halogen lamps with electronic or ferromagnetic transformer



4-gang switch




1-gang Multi standard switched 16A socket with USB Type-A charger




The splash-proof cover allows a 1-gang ELOÉ™ mechanism to be installed in outdoor environments. It also ensures protection against dust. With plug engaged, IP55 protection is maintained.


1-gang British standard 13A socket with USB Type-C charger and IP55 cover

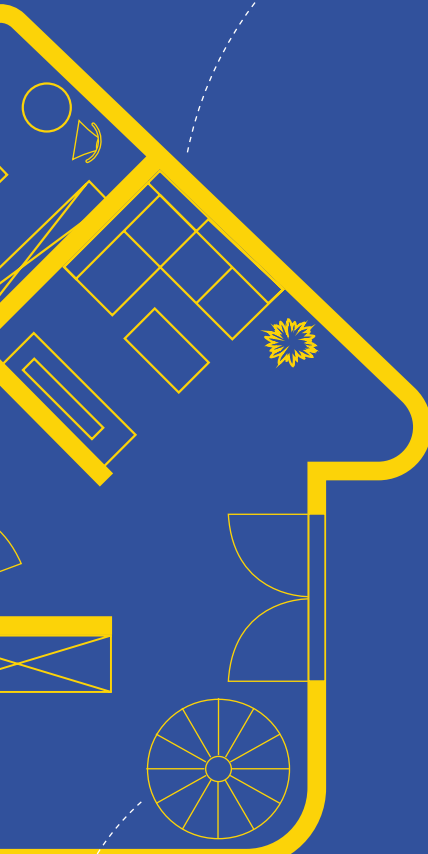

Versatility for modern living

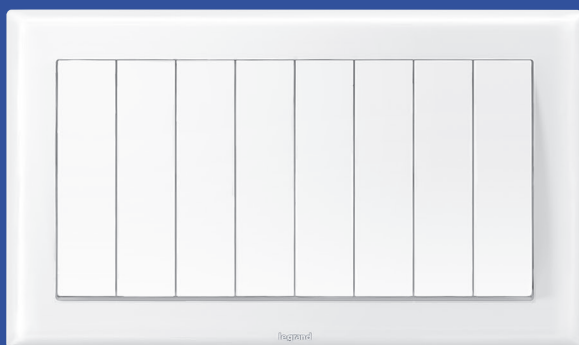

2x4-gang switch in 2-gang box

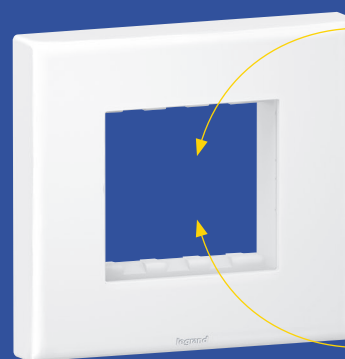

Adapter for Arteor mechanism



Electronic room thermostat



HDMI socket




There is no settling for less. ELOÉ™ works both independently and with the Arteor range. The Arteor adapter offers versatility for your every need – residential, commercial and hospitality projects.

ADD a touch of COMFORT


Comfort is the cornerstone of any hospitality project. That is why the ELOÉ™ range provides dedicated hospitality functions for enhancing experiences in both guest rooms and shared spaces.



Key card switch

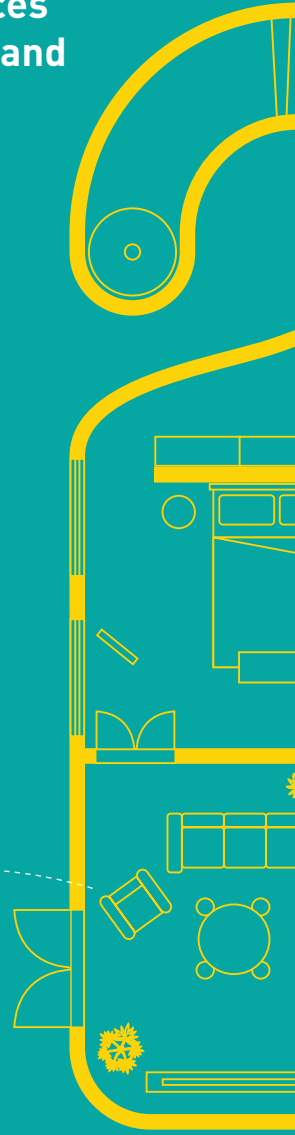


External indicator for corridor

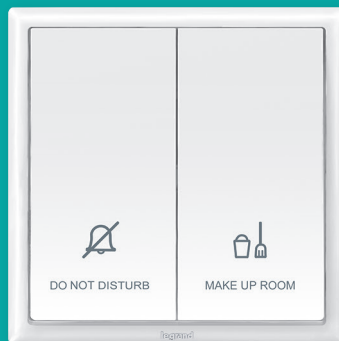

Internal control unit



Keystone data socket

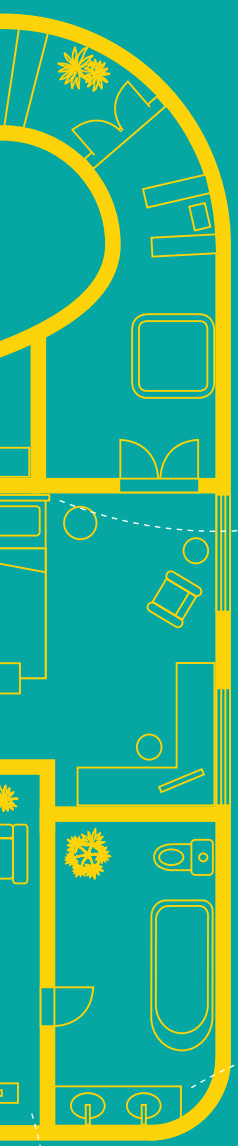

With this multipurpose socket, you can leave it to ELOÉ™ to power and charge up your devices while you recharge yourself.

2-gang Multi standard switched 16A socket with USB Type-A & Type-C dual charger



Better hospitality experiences



1-gang Multistandard switched 16A socket with USB Type-A charger



Shaver socket



6 180 01



6 180 05



6 180 07



6 180 11



6 180 16

Conform to BS EN 60669-1
 Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~
10	6 180 00	1-gang 1-way switch ○ White
10	6 180 01	1-gang 2-way switch ○ White
10	6 180 02	2-gang 1-way switch ○ White
10	6 180 03	2-gang 2-way switch ○ White
10	6 180 09	Intermediate switch ○ White
10	6 180 04	3-gang 1-way switch ○ White
10	6 180 05	3-gang 2-way switch ○ White
10	6 180 06	4-gang 1-way switch ○ White
10	6 180 07	4-gang 2-way switch ○ White

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~ (continued)
5	6 180 24	2x2-gang 2-way switch ○ White
5	6 180 66	2x3-gang 1-way switch ○ White
5	6 180 68	2x4-gang 1-way switch ○ White

Pack	Cat.Nos	Single pole switches 20 AX - 250 V~
10	6 180 20	1-gang 1-way switch ○ White
10	6 180 22	2-gang 1-way switch ○ White

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	6 180 10	1-gang ○ White
10	6 180 15	2-gang ○ White
10	6 180 11	Bell push ○ White
10	6 180 16	2-gang for shutters ○ White

ELOÉ™

double pole switches and cooker control unit



6 180 72



6 180 76

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	6 180 70	1-gang 1-way switch + red neon indicator ○ White
10	6 180 71	1-gang 1-way switch + red neon indicator + 1 earth connection ○ White
10	6 180 71 SH	1-gang 2-way switch + red neon indicator + 2 earth connection ○ White
10	6 180 72	1-gang 1-way switch + red neon indicator + 1 earth connection with "Water Heater" marking ○ White
10	6 180 79	1-gang 2-way switch + red neon indicator + 1 earth connection with "Water Heater" marking ○ White

Pack	Cat.Nos	Double pole switches 32 A - 250 V~
10	6 180 74	1-gang 1-way switch + red neon indicator ○ White

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
10	6 180 75	1-gang 1-way switch ○ White
10	6 180 76	1-gang 1-way switch + red neon indicator ○ White
5	6 180 77	2-gang 1-way vertical switch + red neon indicator ○ White
5	6 180 78	Cooker control unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon ○ White

ELOÉ™

dimmers and ventilation control



6 180 35



6 180 96

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Dimmers
1	6 180 31	500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1-gang 2-way : - 60-500W (230 V) for halogen lamps with electronic transformer with leading edge behaviour ○ White
1	6 180 35	200W LED + 300W Incandescent Rotary dimmer For all types of lamps: - dimmable LEDs: 5 W to 200 W (10 lamps max. 5 W to 37 W (100 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (100 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (100 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (100 V) - halogen and incandescent 240 V 5 W to 300 W / 5 W to 150 W (100 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off ○ White
1	0 401 49	Active Power Compensator Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W
1	6 180 96	5-speed fan control Conform to BS EN 60669-2-1 Fan control 240 V~ - 50 Hz 100V~ ○ White

ELOÉ™

television and telephone sockets



6 180 27



6 180 38



6 180 95

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 180 27	Single TV socket, female ○ White
10	6 180 26	Single TV socket, F-type ○ White
10	6 180 38	Double TV socket, female + SAT, F-type ○ White
5	6 180 32	TV-R-SAT socket ○ White
5	6 180 95	Telephone sockets BS master ○ White
10	6 180 97	RJ 11 socket ○ White

ELOÉ™

data sockets



ELOÉ™

hotel equipment



6 180 93



6 180 34

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Data sockets
10	6 180 93	RJ 45 Cat.5 UTP ○ White
10	6 180 91	RJ 45 Cat.6 UTP ○ White
10	6 180 92	Double RJ 45 Cat.6 UTP ○ White
10	6 180 17	1-gang - single Keystone adaptor ○ White
10	6 180 34	1-gang - double Keystone adaptor ○ White



6 180 12



6 180 18



6 180 37 + 5 720 78

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 180 12	Key card switch 16 A - 230 V~ - 50/60 Hz Time delay of approx. 30 s after card removal Use card with width max. 54 mm ○ White
10	6 180 13	Hotel bedroom call indicators Enable the resident to inform hotel staff of the room status. 2 settings: - Do not disturb - Make up room External Indicator for corridor Installed in the corridor, displays calls ○ White
10	6 180 14	Internal control unit Installed in the room, allows the user to select the desired setting ○ White
1	6 180 18	Shaver sockets Conform to BS 61558. 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep. Spacer delivered to fit in standard box, 35 mm deep 2-gang ○ White
10	6 180 37	Arteor adaptor Allows the integration of 2-module Arteor mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc 1-gang ○ White

For integration of Arteor functions, see **Arteor offer**





6 180 41



6 180 49



6 180 58



6 180 44

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang).
 Supplied with 2 screws M3.5 for BS boxes

British Standard socket outlets 13 A - 250 V~

Pack	Cat.Nos	Description
10	6 180 41	Conform to BS 1363-2 1-gang single pole switched ○ White
5	6 180 46	2-gang single pole switched ○ White
10	6 180 40	1-gang unswitched ○ White
5	6 180 45	2-gang unswitched ○ White
10	6 180 43	1-gang double pole switched ○ White
5	6 180 73	1-gang double pole switched 2 earth terminal ○ White
5	6 180 48	2-gang double pole switched ○ White
10	6 180 42	1-gang single pole switched + neon ○ White
5	6 180 47	2-gang single pole switched + neon ○ White
5	6 180 49	2-gang single pole switched with red cover + neon ● Red

British Standard socket outlets 13 A - 250 V~ with USB charger

Pack	Cat.Nos	Description
1	6 180 58	Conform to BS 1363-2 Conform to IEC 60950-1 1-gang single pole switched with USB Type-A 3 A - 5 V _{DC} 15 W Consumption in passive mode < 0.08 W ○ White
1	6 180 57	1-gang unswitched with USB Type-A 3 A - 5 V _{DC} 15 W Consumption in passive mode < 0.08 W ○ White
1	6 180 30	1-gang unswitched with USB Type-C 3 A - 5 V _{DC} 15 W Consumption in passive mode < 0.08 W ○ White
1	6 180 44	2-gang single pole switched with USB Type-A + Type-C 3 A - 5 V _{DC} 15 W Consumption in passive mode < 0.08 W ○ White

British Standard socket outlets 15 A - 250 V~

Pack	Cat.Nos	Description
10	6 180 51	Conform to BS 546 1-gang single pole switched ○ White
5	6 180 52	1-gang single pole switched + neon ○ White
5	6 180 53	2-gang single pole switched ○ White

British Standard socket outlets 5 A - 250 V~

Pack	Cat.Nos	Description
10	6 180 54	Conform to BS 546 1-gang single pole switched ○ White

ELOÉ™

socket outlets (continued)



6 180 67



6 180 65



6 180 59



6 180 55

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Euro/US socket outlets - 16 A - 250 V \sim / 15 A - 127 V \sim
10	6 180 62	1-gang 2 x 2P ○ White
10	6 180 90	1-gang 2 x 2P switched ○ White
10	6 180 64	1-gang 2 x 2P+E ○ White
10	6 180 56	German Standard socket outlet 16 A - 250 V\sim 1-gang 2P+E with shutters for child protection ○ White
10	6 180 67	Multistandard switched socket outlet 15 A 127 V\sim / 16 A 250 V\sim 1-gang ○ White
5	6 180 69	2-gang ○ White

Pack	Cat.Nos	Multistandard switched socket and Euro/ US socket outlets
10	6 180 65	1-gang ○ White
1	6 180 59	Multistandard switched socket outlets 16 A 250 V\sim / 15 A - 127 V\sim with USB charger Shuttered for child safety USB charger conform to IEC 60950-1 1-gang 2P+E with USB Type-A 3 A - 5 V \approx 15 W Consumption in passive mode < 0.08 W ○ White
1	6 180 55	2-gang 2 x 2P+E with USB Type-A + Type-C 3 A - 5 V \approx 15 W Consumption in passive mode < 0.08 W ○ White

ELOÉ™

fused connection units and cable outlets



6 180 82



6 180 85

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Fused connection units 13 A
10	6 180 80	Conform to BS 1363-4 Unswitched + cord outlet ○ White
5	6 180 81	Switched + cord outlet ○ White
10	6 180 60	Unswitched + neon + cord outlet ○ White
10	6 180 82	Switched + neon + cord outlet ○ White
Cable outlets		
Conform to BS 5733		
10	6 180 85	20 A - 250 V~ ○ White
10	6 180 86	45 A - 250 V~ ○ White

ELOÉ™

blanking plates and accessories



6 180 28



6 180 37 + 5 720 72



6 176 36 + 6 180 65

Pack	Cat.Nos	Blanking plates
Conform to IEC 60670-1		
10	6 180 28	1-gang ○ White
10	6 180 39	2-gang ○ White
Arteor adaptor		
Allows the integration of 2-module Arteor mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc		
10	6 180 37	1-gang ○ White
Fixing accessories		
Splash-proof cover		
Mainly for socket protection IP 55 with or without plug engaged Space inside : 86 x 86 mm External dimensions : 129,2 x 107,2 x 54,1 mm		
4	6 176 36	● Mist grey
Surface-mounting boxes		
Conform to BS 5733 Depth 35 mm		
8	6 133 50	1-gang ○ White
4	6 133 51	2-gang ○ White


For integration of Arteor functions, see **Arteor offer**






Head Office

and International Department
87045 Limoges Cedex -
France

 + 33 (0) 5 55 06 87 87

 + 33 (0) 5 55 06 74 55

FOLLOW US ON:

-  legrand.com
-  youtube.com/user/legrand
-  twitter.com/Legrand
-  pinterest.com/legrandgroup
-  facebook.com/Legrand
-  instagram.com/legrandnews

PLEASE UPDATE WITH YOUR
LOCAL SOCIAL MEDIA